


Solderless terminals



BLADE Nylon-insulated (straight)

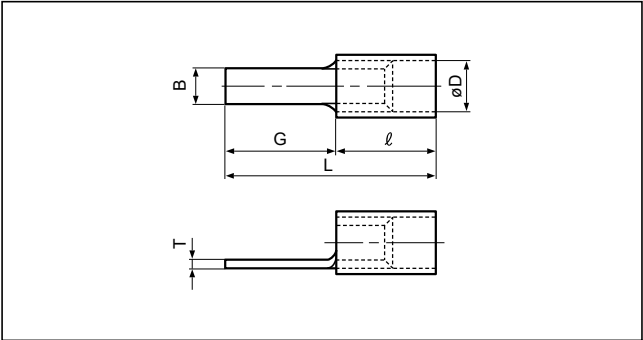

Certificate No.:  E42024

Applicable Wire AWG#(mm²)	Part No.	Standard	Dimensions mm (in.)						Color	Tool No.				Qty/box
			B	L	G	ℓ	øD	T		YNT-2216	YA-1	YA-2	YA-4	
22 to 16 *(0.25 to 1.65)	N1.25-1AF		2.8 (.110)	18.0 (.709)	9.0 (.354)	9.0 (.354)	3.2 (.126)	0.8 (.031)	Red	○	○	○	○	1,000

Note: 1) *The crimping will be more secure if the total cross-sectional area of the wire is at least 0.5 mm².
Examples: If the cross-sectional area of the wire is 0.3 mm², fold the wire in two when crimping the terminal.
If the cross-sectional area of the wire is 0.5 mm², crimp the terminal onto the wire as it is.
2) Delivery lead times may vary depending on the product. Contact JST for details.